


ITEM NO.: 31082/32

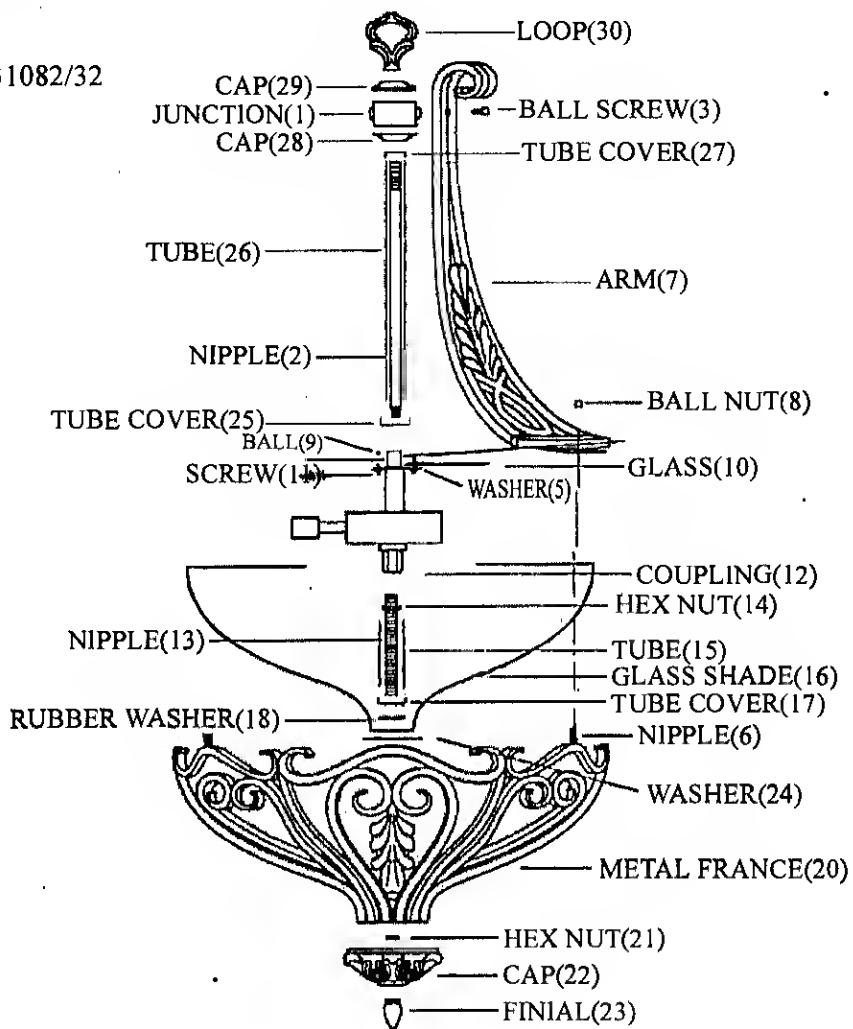

1. Carefully remove the fixture out of the carton, and check that all parts are included referring to the above illustration. Make sure not to misplace any parts that are needed for the installation;
2. Screw the NIPPLE(2) onto the COUPLING(4);
3. Slide the TUBE COVER(25), TUBE(26), TUBE COVER(27), CAP(28), JUNCTION(1), CAP(29) onto the NIPPLE(2), then tighten them with LOOP(30);
4. Thread the HEX NUT(14) onto the NIPPLE(13) properly, then screw the NIPPLE(13) into the COUPLING(12);
5. Slide the TUBE(15), TUBE COVER(17), RUBBER WASHER(18), WASHER(24), GLASS SHADE(16), METAL FRANCE(20) onto the NIPPLE(13), and secure them with HEX NUT(21);
6. Protruding NIPPLE(6) through the holes on the bottom end of ARM(7), fix it by BALL NUT(8), then attach the top end of the ARM(7) using BALL SCREW(3) to the JUNCTION(1);
7. Slide CAP(22) onto the NIPPLE(13), then fix it by the FINIAL(23);
8. Slide the GLASS(10) onto the SCREW(11), then fix it by BALL(9);
9. Install the lamps on;